

Cantilever racking for light to medium loads

The ability to rapidly modify the storage system pays off on a day-to-day basis when staging material and storing pipes, profiles or long, bulky materials. The KRM cantilever racking system is the right choice for single- or double-face use, partitioning the cantilever racking or with storage trays. No tools are required to adjust the cantilever arms.



GALVANIZED

Cantilever upright

GENTIAN BLUE

Feet,
Cantilever arms

RAL 5010

- **Load-bearing capacity**
Up to 2,300 kg per rack side with uniform height division
- **System hole pattern**
with adjustment spacing 50 : 50 mm
- **Bolting system**
Support profiles are bolted together with horizontal braces to form rack rows and reinforced with cross braces in every 4th rack field
- **On-line shelving and storage**
of pipes, profiles or long, bulky materials
- **Easy assembly**
with only a few components
- **Single- or double-face racks**
- **Attachable cantilevers**
enable adjustment without tools
- **Robust construction**
- **Solid base**

KRM system design

Cantilever arms
page E10Dividing pins
page E11Storage trays
page E11Cantilever upright
(single-face)
page E10Horizontal braces
page E10Cantilever uprights
(double-face)
page E10Cross braces
page E11

Load sign



Cantilever arm



Dividing pins



Storage tray




Horizontal brace

Boxes /
containersModular
shelvingLongspan
rackingPallet
rackingCantilever
rackingMezzanines /
platformsOn-line shelving /
KRM shelvingSemi-automated
solutionsLogistics
systems

Appendix



KRM cantilever upright and accessories

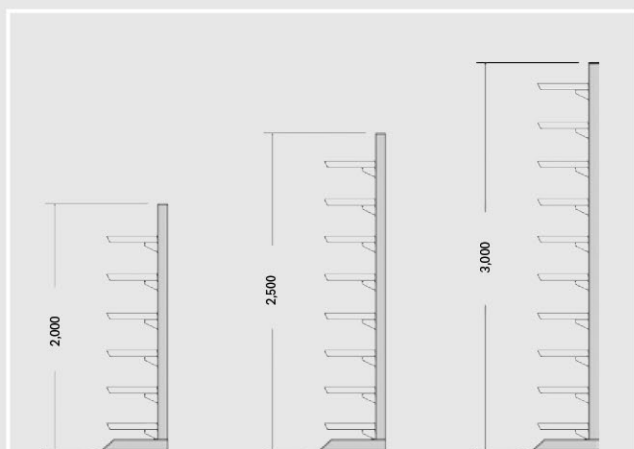

Cantilever upright, single-face

Steel, galvanized. Configuration system 50 : 50 mm, foot profiles made of angled profiles in Gentian Blue RAL 5010 for uniform load distribution on the floor. 2 horizontal braces required to connect cantilever uprights.


Item	Upright height (mm)	Usable depth (mm)	Total depth (mm)	Load (kg)	Order no.
KRM-KASE200400	2,000	400	700	2,300	6689906
KRM-KASE200500		500	800	1,900	6689907
KRM-KASE200600		600	900	1,650	6689908
KRM-KASE200800		800	1,100	1,200	6689909
KRM-KASE250400	2,500	400	700	2,150	6689910
KRM-KASE250500		500	800	1,750	6689911
KRM-KASE250600		600	900	1,500	6689912
KRM-KASE250800		800	1,100	1,000	6689913
KRM-KASE300400	3,000	400	700	2,000	6689914
KRM-KASE300500		500	800	1,600	6689915
KRM-KASE300600		600	900	1,350	6689916
KRM-KASE300800		800	1,100	950	6689917



Horizontal braces

Steel, galvanized. 2 horizontal braces required to connect cantilever uprights.

Item	Center distance (mm)	Order no.
KRM-LV06	600	6689930
KRM-LV08	800	6689931
KRM-LV10	1,000	6689932
KRM-LV12	1,250	6689933
KRM-LV15	1,500	6689934

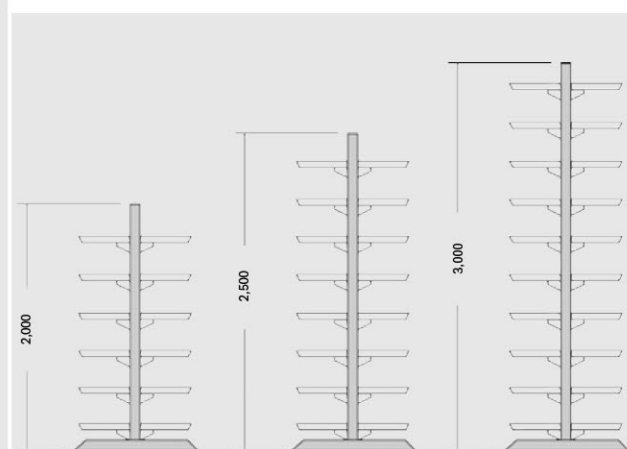

Cantilever uprights, double-face

Steel, galvanized. Configuration system 50 : 50 mm, foot profiles made of angled profiles in Gentian Blue RAL 5010 for uniform load distribution on the floor. 2 horizontal braces required to connect cantilever uprights.

Item	Upright height (mm)	Usable depth (mm)	Total depth (mm)	Load (kg/side)	Order no.
KRM-KASD200400	2,000	400	1,040	2,300	6689918
KRM-KASD200500		500	1,240	1,900	6689919
KRM-KASD200600		600	1,440	1,650	6689920
KRM-KASD200800		800	1,840	1,200	6689921
KRM-KASD250400	2,500	400	1,040	2,150	6689922
KRM-KASD250500		500	1,240	1,750	6689923
KRM-KASD250600		600	1,440	1,500	6689924
KRM-KASD250800		800	1,840	1,000	6689925
KRM-KASD300400	3,000	400	1,040	2,000	6689926
KRM-KASD300500		500	1,240	1,600	6689927
KRM-KASD300600		600	1,440	1,350	6689928
KRM-KASD300800		800	1,840	950	6689929



Cantilever arms

Steel, painted: Gentian Blue, RAL 5010. Adjustable without tools, adjusting grid 50 : 50 mm, including holes for dividing pins.

Item	Cantilever arm length (mm)	Load (kg)	Order no.
KRM-KA400	400	350	6689902
KRM-KA500	500	300	6689903
KRM-KA600	600	250	6689904
KRM-KA800	800	180	6689905

Order no. = on stock

